

FSM5560-IP66

54.6-inch Industrial IP66 Waterproof Stainless Steel LCD Monitor

Features

- 54.6" TFT LCD Monitor with Resolution up to 1920 x 1080
- IP66/NEMA4X Waterproof, Stainless Steel Housing
- 700/2500nits High Brightness for Sunlight Readable (Optional)
- Wide Temperature Support -30°~+60°C (Optional)
- IR Touch Screen (Optional)



SPECIFICATION

Display	Size/Panel Type	54.6" TFT LCD Panel
	Resolution	1920 x 1080
	Brightness (cd/m ²)	500cd/m ² (Optional: 700/2500cd/m ²)
	Contrast Ratio	4000:1
	Response Time	6.5ms
	Backlight	LED Backlight Unit
	Colors	16.7M Colors
	Viewing Angle (H/V)	178°/178
	Surface Hardness	7H, AR Glass
Touch Screen	Touch Screen Type	IR Touch (Optional)
	Surface Hardness	7H (AG Glass)
Environment	Operating Temperature	0°~50°C
	Storage Temperature	-20°C~+60°C
	Humidity	5%~95% RH(Non-Condensing)
	Waterproof Rating	IP66/NEMA4X, 6 Side Waterproof
System	OSD	Menu, Auto, On/Off, Up, Down
	I/O Interface	DVI x 1, VGA x 1, Power in x 1
	Power Input	AC100~240V
	Power Consumption	230W
	Certification	FCC/CE/RoHS Compliance
	Mounting	VESA 600 x 600
	Dimension/Weight	1352.6mm (W) x 823.6mm (H) x 110mm (D)/62kgs

Specifications subject to change without notice

ORDERING CODE




FSM5560-IP66-XXXX

- IR = IR Touch Screen
- HB700 = 700nits High Brightness
- HB2500 = 2500nits High Brightness
- W = Wide Temperature, -30°~+60°C
- LS = Light Sensor, Auto Dimming



ACCESSORIES

- DVI Cable x 1 (1.8M)
- VGA Cable x 1 (1.8M)
- AC Power Cord x 1 (1.8M)

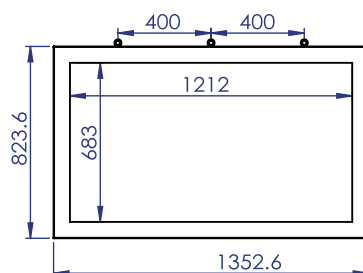

8-M6 VESA MOUNT

Unit:mm